


ESCALERA PLATAFORMA/RETRÁCTIL



Uso Industrial:

150 kg.

FIBRA DE VIDRIO

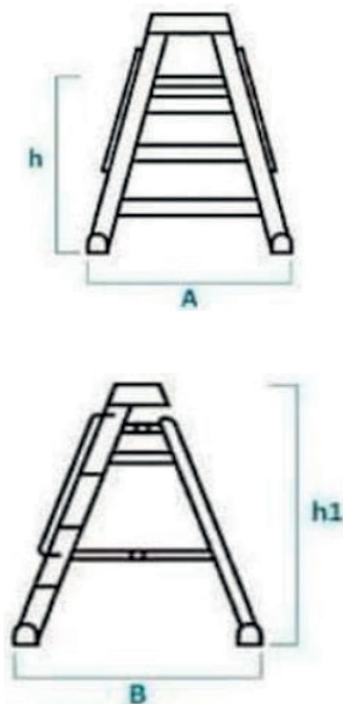

ESPECIFICACIONES			DIMENSIONES (METROS)			
NÚMERO PASOS	PESO APROX.	CAPACIDAD DE CARGA	ALTURA A LA PLATAF. (H)	ALTURA ABIERTO (H1)	ANCHO FRONTAL (A)	APERTURA (B)
2	6.00 kg	150kg	0.58	1.33	0.44	0.70
3	7.50 kg	150kg	0.87	1.60	0.44	0.77
4	8.50 kg	150kg	1.12	1.71	0.47	0.93
5	9.50 kg	150 kg	1.45	2.29	0.50	1.24
6	11.20 kg	150 kg	1.70	2.57	0.54	1.40
7	12.40kg	150kg	1.95	2.75	0.58	1.55
8	14.50 kg	150 kg	2.20	3.10	0.61	1.86
9	15.50 kg	150 kg	2.45	3.30	0.64	2.02
10	16.50 kg	150 kg	2.70	3.68	0.68	2.18
11	18.50 kg	150 kg	3.05	3.98	0.72	2.24
12	20.50 kg	150 kg	3.44	4.29	0.76	2.31

Ficha técnica



Tapa completa de aluminio reforzado



Peldaños con superficie antideslizantes



Tirantes separadores antipellizco



Refuerzos en las cuatro patas



Zapatas de aluminio reforzadas con jébe antideslizantes



Agarraderas de mano de seguridad

CERTIFICACIONES:

